

Cyanate Ester PCB Material

Recommended Drill Series: 100, 150, 430, 460, 480

| Drill Size | Diameter (inch) | Feed (inch/min) | Speed (k-rpm) | Retract (inch/min) | Z-Axis Offset (inches) | Max Hits | Chipload (mm/rev) | SFM |
|------------|--------------------|--------------------|------------------|-----------------------|---------------------------|----------|----------------------|-----|
| 0.10mm | 0.0040 | 19 | 110 | 200 | -0.011 | 400 | 0.17 | 115 |
| 0.13mm | 0.0050 | 22 | 110 | 300 | -0.011 | 400 | 0.20 | 144 |
| 0.15mm | 0.0059 | 25 | 110 | 300 | -0.011 | 400 | 0.23 | 170 |
| #96 | 0.0063 | 28 | 110 | 400 | -0.011 | 400 | 0.25 | 181 |
| #95 | 0.0067 | 30 | 110 | 400 | -0.012 | 400 | 0.27 | 193 |
| #94 | 0.0071 | 31 | 110 | 500 | -0.012 | 400 | 0.28 | 204 |
| #93 | 0.0075 | 33 | 110 | 500 | -0.012 | 400 | 0.30 | 216 |
| #92 | 0.0079 | 36 | 110 | 500 | -0.012 | 400 | 0.33 | 227 |
| #91 | 0.0083 | 39 | 110 | 600 | -0.012 | 400 | 0.35 | 239 |
| #90 | 0.0087 | 41 | 110 | 600 | -0.012 | 400 | 0.37 | 250 |
| #89 | 0.0091 | 44 | 110 | 700 | -0.012 | 400 | 0.40 | 262 |
| #88 | 0.0095 | 46 | 110 | 700 | -0.012 | 400 | 0.42 | 273 |
| 0.25mm | 0.0098 | 47 | 110 | 800 | -0.012 | 400 | 0.43 | 282 |
| #87 | 0.0100 | 47 | 110 | 800 | -0.012 | 400 | 0.43 | 288 |
| #86 | 0.0105 | 50 | 110 | 800 | -0.012 | 400 | 0.45 | 302 |
| #85 | 0.0110 | 52 | 110 | 900 | -0.013 | 400 | 0.47 | 317 |
| #84 | 0.0115 | 53 | 110 | 900 | -0.013 | 400 | 0.48 | 331 |
| 0.30mm | 0.0118 | 56 | 110 | 1000 | -0.013 | 400 | 0.51 | 340 |
| #83 | 0.0120 | 57 | 110 | 1000 | -0.013 | 400 | 0.52 | 345 |
| #82 | 0.0125 | 64 | 110 | 1000 | -0.013 | 400 | 0.58 | 360 |
| #81 | 0.0130 | 67 | 106 | 1000 | -0.013 | 400 | 0.63 | 360 |
| #80 | 0.0135 | 70 | 102 | 1000 | -0.013 | 600 | 0.69 | 360 |
| 0.35mm | 0.0138 | 72 | 100 | 1000 | -0.013 | 600 | 0.72 | 360 |
| #79 | 0.0145 | 75 | 95 | 1000 | -0.013 | 600 | 0.79 | 360 |
| 1/64 | 0.0156 | 78 | 88 | 1000 | -0.014 | 600 | 0.88 | 360 |
| 0.40mm | 0.0158 | 78 | 87 | 1000 | -0.014 | 600 | 0.90 | 360 |
| #78 | 0.0160 | 80 | 86 | 1000 | -0.014 | 600 | 0.93 | 360 |
| 0.45mm | 0.0177 | 83 | 78 | 1000 | -0.014 | 600 | 1.07 | 360 |
| #77 | 0.0180 | 84 | 76 | 1000 | -0.014 | 600 | 1.10 | 360 |
| 0.50mm | 0.0197 | 86 | 70 | 1000 | -0.015 | 600 | 1.23 | 360 |
| #76 | 0.0200 | 86 | 69 | 1000 | -0.015 | 600 | 1.25 | 360 |
| #75 | 0.0210 | 88 | 66 | 1000 | -0.015 | 600 | 1.34 | 360 |
| 0.55mm | 0.0217 | 90 | 63 | 1000 | -0.015 | 600 | 1.42 | 360 |
| #74 | 0.0225 | 92 | 61 | 1000 | -0.015 | 600 | 1.50 | 360 |
| 0.60mm | 0.0236 | 93 | 58 | 1000 | -0.016 | 600 | 1.60 | 360 |
| #73 | 0.0240 | 94 | 57 | 1000 | -0.016 | 600 | 1.64 | 360 |
| #72 | 0.0250 | 92 | 55 | 1000 | -0.016 | 600 | 1.67 | 360 |
| 0.65mm | 0.0256 | 91 | 54 | 1000 | -0.016 | 600 | 1.69 | 360 |
| #71 | 0.0260 | 90 | 53 | 1000 | -0.016 | 600 | 1.70 | 360 |
| 0.70mm | 0.0276 | 88 | 50 | 1000 | -0.016 | 600 | 1.76 | 360 |
| #70 | 0.0280 | 87 | 49 | 1000 | -0.017 | 600 | 1.78 | 360 |
| #69 | 0.0292 | 86 | 47 | 1000 | -0.017 | 600 | 1.83 | 360 |
| 0.75mm | 0.0295 | 86 | 47 | 1000 | -0.017 | 600 | 1.83 | 360 |
| #68 | 0.0310 | 84 | 44 | 1000 | -0.017 | 800 | 1.91 | 360 |
| 1/32 | 0.0312 | 84 | 44 | 1000 | -0.017 | 800 | 1.91 | 360 |
| 0.80mm | 0.0315 | 84 | 44 | 1000 | -0.017 | 800 | 1.91 | 360 |
| #67 | 0.0320 | 83 | 43 | 1000 | -0.017 | 800 | 1.93 | 360 |
| #66 | 0.0330 | 82 | 42 | 1000 | -0.018 | 800 | 1.95 | 360 |
| 0.85mm | 0.0335 | 82 | 41 | 1000 | -0.018 | 800 | 2.00 | 360 |
| #65 | 0.0350 | 78 | 39 | 1000 | -0.018 | 800 | 2.00 | 360 |
| 0.90mm | 0.0354 | 78 | 39 | 1000 | -0.018 | 800 | 2.00 | 360 |
| #64 | 0.0360 | 76 | 38 | 1000 | -0.018 | 800 | 2.00 | 360 |
| #63 | 0.0370 | 74 | 37 | 1000 | -0.019 | 800 | 2.00 | 360 |
| 0.95mm | 0.0374 | 74 | 37 | 1000 | -0.019 | 800 | 2.00 | 360 |
| #62 | 0.0380 | 72 | 36 | 1000 | -0.019 | 800 | 2.00 | 360 |
| #61 | 0.0390 | 70 | 35 | 1000 | -0.019 | 800 | 2.00 | 360 |
| 1.00mm | 0.0394 | 70 | 35 | 1000 | -0.019 | 800 | 2.00 | 360 |
| #60 | 0.0400 | 68 | 34 | 1000 | -0.019 | 800 | 2.00 | 360 |
| #59 | 0.0410 | 66 | 33 | 1000 | -0.020 | 800 | 2.00 | 360 |
| 1.05mm | 0.0413 | 66 | 33 | 1000 | -0.020 | 800 | 2.00 | 360 |
| #58 | 0.0420 | 66 | 33 | 1000 | -0.020 | 800 | 2.00 | 360 |
| #57 | 0.0430 | 64 | 32 | 1000 | -0.020 | 800 | 2.00 | 360 |
| 1.10mm | 0.0433 | 64 | 32 | 1000 | -0.020 | 800 | 2.00 | 360 |
| 1.15mm | 0.0453 | 60 | 30 | 1000 | -0.021 | 800 | 2.00 | 360 |

Note: This information is based on 110K RPM Spindle Capability. Please use maximum spindle speed if listed RPM is unattainable

(U.S.) 1.888.848.9266

(International) 001.714.428.3655

Visit us online at KyoceraPrecisionTools.com

| Drill Size | Diameter (inch) | Feed (inch/min) | Speed (k-rpm) | Retract (inch/min) | Z-Axis Offset (inches) | Max Hits | Chipload (mm/rev) | SFM |
|------------|--------------------|--------------------|------------------|-----------------------|---------------------------|----------|----------------------|-----|
| #56 | 0.0465 | 60 | 30 | 1000 | -0.021 | 800 | 2.00 | 360 |
| 3/64 | 0.0469 | 58 | 29 | 1000 | -0.021 | 800 | 2.00 | 360 |
| 1.20mm | 0.0472 | 58 | 29 | 1000 | -0.021 | 800 | 2.00 | 360 |
| 1.25mm | 0.0492 | 56 | 28 | 1000 | -0.021 | 800 | 2.00 | 360 |
| 1.30mm | 0.0512 | 54 | 27 | 1000 | -0.022 | 800 | 2.00 | 360 |
| #55 | 0.0520 | 52 | 26 | 1000 | -0.022 | 800 | 2.00 | 360 |
| 1.35mm | 0.0531 | 52 | 26 | 1000 | -0.022 | 800 | 2.00 | 360 |
| #54 | 0.0550 | 50 | 25 | 1000 | -0.023 | 800 | 2.00 | 360 |
| 1.40mm | 0.0551 | 50 | 25 | 1000 | -0.023 | 800 | 2.00 | 360 |
| 1.45mm | 0.0571 | 48 | 24 | 1000 | -0.023 | 800 | 2.00 | 360 |
| 1.50mm | 0.0591 | 46 | 23 | 1000 | -0.024 | 800 | 2.00 | 360 |
| #53 | 0.0595 | 46 | 23 | 1000 | -0.024 | 800 | 2.00 | 360 |
| 1.55mm | 0.0610 | 46 | 23 | 1000 | -0.024 | 800 | 2.00 | 360 |
| 1/16 | 0.0625 | 44 | 22 | 1000 | -0.025 | 800 | 2.00 | 360 |
| 1.60mm | 0.0630 | 44 | 22 | 1000 | -0.025 | 800 | 2.00 | 360 |
| #52 | 0.0635 | 42 | 21 | 1000 | -0.025 | 800 | 2.00 | 360 |
| 1.65mm | 0.0650 | 42 | 21 | 1000 | -0.025 | 800 | 2.00 | 360 |
| 1.70mm | 0.0669 | 42 | 21 | 1000 | -0.026 | 800 | 2.00 | 360 |
| #51 | 0.0670 | 42 | 21 | 1000 | -0.026 | 800 | 2.00 | 360 |
| 1.75mm | 0.0689 | 40 | 20 | 1000 | -0.026 | 800 | 2.00 | 360 |
| #50 | 0.0700 | 40 | 20 | 1000 | -0.026 | 800 | 2.00 | 366 |
| 1.80mm | 0.0709 | 40 | 20 | 1000 | -0.027 | 800 | 2.00 | 371 |
| 1.85mm | 0.0728 | 40 | 20 | 1000 | -0.027 | 800 | 2.00 | 381 |
| #49 | 0.0730 | 40 | 20 | 1000 | -0.027 | 800 | 2.00 | 382 |
| 1.90mm | 0.0748 | 40 | 20 | 1000 | -0.027 | 800 | 2.00 | 391 |
| #48 | 0.0760 | 40 | 20 | 1000 | -0.028 | 800 | 2.00 | 398 |
| 1.95mm | 0.0768 | 40 | 20 | 1000 | -0.028 | 800 | 2.00 | 402 |
| 5/64 | 0.0781 | 38 | 20 | 1000 | -0.028 | 800 | 1.90 | 409 |
| #47 | 0.0785 | 38 | 20 | 1000 | -0.028 | 800 | 1.90 | 411 |
| 2.00mm | 0.0787 | 38 | 20 | 1000 | -0.028 | 800 | 1.90 | 412 |
| 2.05mm | 0.0807 | 38 | 20 | 1000 | -0.029 | 800 | 1.90 | 422 |
| #46 | 0.0810 | 38 | 20 | 1000 | -0.029 | 800 | 1.90 | 424 |
| #45 | 0.0820 | 38 | 20 | 1000 | -0.029 | 800 | 1.90 | 429 |
| 2.10mm | 0.0827 | 36 | 20 | 1000 | -0.029 | 800 | 1.80 | 433 |
| 2.15mm | 0.0846 | 36 | 20 | 1000 | -0.030 | 800 | 1.80 | 443 |
| #44 | 0.0860 | 36 | 20 | 1000 | -0.030 | 800 | 1.80 | 450 |
| 2.20mm | 0.0866 | 36 | 20 | 1000 | -0.030 | 800 | 1.80 | 453 |
| 2.25mm | 0.0886 | 36 | 20 | 1000 | -0.031 | 800 | 1.80 | 464 |
| #43 | 0.0890 | 36 | 20 | 1000 | -0.031 | 800 | 1.80 | 466 |
| 2.30mm | 0.0906 | 34 | 20 | 1000 | -0.031 | 800 | 1.70 | 474 |
| 2.35mm | 0.0925 | 34 | 20 | 1000 | -0.032 | 800 | 1.70 | 484 |
| #42 | 0.0935 | 34 | 20 | 1000 | -0.032 | 800 | 1.70 | 489 |
| 3/32 | 0.0938 | 34 | 20 | 1000 | -0.032 | 800 | 1.70 | 491 |
| 2.40mm | 0.0945 | 34 | 20 | 1000 | -0.032 | 800 | 1.70 | 495 |
| #41 | 0.0960 | 34 | 20 | 1000 | -0.032 | 800 | 1.70 | 502 |
| 2.45mm | 0.0965 | 34 | 20 | 1000 | -0.033 | 800 | 1.70 | 505 |
| #40 | 0.0980 | 34 | 20 | 1000 | -0.033 | 800 | 1.70 | 513 |
| 2.50mm | 0.0984 | 34 | 20 | 1000 | -0.033 | 800 | 1.70 | 515 |
| #39 | 0.0995 | 34 | 20 | 1000 | -0.033 | 800 | 1.70 | 521 |
| 2.55mm | 0.1004 | 34 | 20 | 1000 | -0.033 | 800 | 1.70 | 525 |
| #38 | 0.1015 | 34 | 20 | 1000 | -0.034 | 800 | 1.70 | 531 |
| 2.60mm | 0.1024 | 34 | 20 | 1000 | -0.034 | 800 | 1.70 | 536 |
| #37 | 0.1040 | 34 | 20 | 1000 | -0.034 | 800 | 1.70 | 544 |
| 2.65mm | 0.1043 | 34 | 20 | 1000 | -0.034 | 800 | 1.70 | 546 |
| 2.70mm | 0.1063 | 32 | 20 | 1000 | -0.035 | 800 | 1.60 | 556 |
| #36 | 0.1065 | 32 | 20 | 1000 | -0.035 | 800 | 1.60 | 557 |
| 2.75mm | 0.1083 | 32 | 20 | 1000 | -0.035 | 800 | 1.60 | 567 |
| 7/64 | 0.1094 | 32 | 20 | 1000 | -0.036 | 800 | 1.60 | 573 |
| #35 | 0.1100 | 32 | 20 | 1000 | -0.036 | 800 | 1.60 | 576 |
| 2.80mm | 0.1102 | 32 | 20 | 1000 | -0.036 | 800 | 1.60 | 577 |
| #34 | 0.1110 | 32 | 20 | 1000 | -0.036 | 800 | 1.60 | 581 |
| 2.85mm | 0.1122 | 32 | 20 | 1000 | -0.036 | 800 | 1.60 | 587 |
| #33 | 0.1130 | 32 | 20 | 1000 | -0.036 | 800 | 1.60 | 591 |
| 2.90mm | 0.1142 | 32 | 20 | 1000 | -0.037 | 800 | 1.60 | 598 |
| #32 | 0.1160 | 32 | 20 | 1000 | -0.037 | 800 | 1.60 | 607 |
| 2.95mm | 0.1161 | 32 | 20 | 1000 | -0.037 | 800 | 1.60 | 608 |
| 3.00mm | 0.1181 | 32 | 20 | 1000 | -0.038 | 800 | 1.60 | 618 |
| #31 | 0.1200 | 32 | 20 | 1000 | -0.038 | 800 | 1.60 | 628 |
| 3.05mm | 0.1201 | 32 | 20 | 1000 | -0.038 | 800 | 1.60 | 629 |
| 3.10mm | 0.1220 | 32 | 20 | 1000 | -0.038 | 800 | 1.60 | 638 |
| 3.15mm | 0.1240 | 32 | 20 | 1000 | -0.039 | 800 | 1.60 | 649 |
| 1/8 | 0.1250 | 32 | 20 | 1000 | -0.039 | 800 | 1.60 | 654 |

Note: This information is based on 110K RPM Spindle Capability. Please use maximum spindle speed if listed RPM is unattainable

(U.S.) 1.888.848.9266

(International) 001.714.428.3655

Visit us online at KyoceraPrecisionTools.com

| Drill Size | Diameter (inch) | Feed (inch/min) | Speed (k-rpm) | Retract (inch/min) | Z-Axis Offset (inches) | Max Hits | Chipload (mm/rev) | SFM |
|------------|--------------------|--------------------|------------------|-----------------------|---------------------------|----------|----------------------|------|
| 3.20mm | 0.1260 | 30 | 20 | 1000 | -0.018 | 500 | 1.50 | 659 |
| 3.25mm | 0.1280 | 30 | 20 | 1000 | -0.018 | 500 | 1.50 | 670 |
| #30 | 0.1285 | 30 | 20 | 1000 | -0.019 | 500 | 1.50 | 672 |
| 3.30mm | 0.1299 | 30 | 20 | 1000 | -0.019 | 500 | 1.50 | 680 |
| 3.35mm | 0.1319 | 30 | 20 | 1000 | -0.019 | 500 | 1.50 | 690 |
| 3.40mm | 0.1339 | 30 | 20 | 1000 | -0.019 | 500 | 1.50 | 701 |
| 3.45mm | 0.1358 | 30 | 20 | 1000 | -0.019 | 500 | 1.50 | 711 |
| #29 | 0.1360 | 30 | 20 | 1000 | -0.019 | 500 | 1.50 | 712 |
| 3.50mm | 0.1378 | 30 | 20 | 1000 | -0.019 | 500 | 1.50 | 721 |
| 3.55mm | 0.1398 | 30 | 20 | 1000 | -0.019 | 500 | 1.50 | 732 |
| #28 | 0.1405 | 30 | 20 | 1000 | -0.019 | 500 | 1.50 | 735 |
| 9/64 | 0.1406 | 30 | 20 | 1000 | -0.019 | 500 | 1.50 | 736 |
| 3.60mm | 0.1417 | 30 | 20 | 1000 | -0.019 | 500 | 1.50 | 742 |
| 3.65mm | 0.1437 | 30 | 20 | 1000 | -0.020 | 500 | 1.50 | 752 |
| #27 | 0.1440 | 30 | 20 | 1000 | -0.020 | 500 | 1.50 | 754 |
| 3.70mm | 0.1457 | 30 | 20 | 1000 | -0.020 | 500 | 1.50 | 762 |
| #26 | 0.1470 | 30 | 20 | 1000 | -0.020 | 500 | 1.50 | 769 |
| 3.75mm | 0.1476 | 30 | 20 | 1000 | -0.020 | 500 | 1.50 | 772 |
| #25 | 0.1495 | 30 | 20 | 1000 | -0.020 | 500 | 1.50 | 782 |
| 3.80mm | 0.1496 | 30 | 20 | 1000 | -0.020 | 500 | 1.50 | 783 |
| 3.85mm | 0.1516 | 30 | 20 | 1000 | -0.020 | 500 | 1.50 | 793 |
| #24 | 0.1520 | 30 | 20 | 1000 | -0.020 | 500 | 1.50 | 795 |
| 3.90mm | 0.1535 | 25 | 20 | 1000 | -0.020 | 500 | 1.25 | 803 |
| #23 | 0.1540 | 25 | 20 | 1000 | -0.020 | 500 | 1.25 | 806 |
| 3.95 | 0.1555 | 25 | 20 | 1000 | -0.020 | 500 | 1.25 | 814 |
| 5/32 | 0.1562 | 25 | 20 | 1000 | -0.020 | 500 | 1.25 | 817 |
| #22 | 0.1570 | 25 | 20 | 1000 | -0.020 | 500 | 1.25 | 822 |
| 4.00mm | 0.1575 | 25 | 20 | 1000 | -0.020 | 500 | 1.25 | 824 |
| #21 | 0.1590 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 832 |
| 4.05mm | 0.1594 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 834 |
| #20 | 0.1610 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 843 |
| 4.10mm | 0.1614 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 845 |
| 4.15mm | 0.1634 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 855 |
| 4.20mm | 0.1654 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 866 |
| #19 | 0.1660 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 869 |
| 4.25mm | 0.1673 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 876 |
| 4.30mm | 0.1693 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 886 |
| #18 | 0.1695 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 887 |
| 4.35mm | 0.1713 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 896 |
| 11/64 | 0.1719 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 900 |
| #17 | 0.1730 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 905 |
| 4.40mm | 0.1732 | 25 | 20 | 1000 | -0.021 | 500 | 1.25 | 906 |
| 4.45mm | 0.1752 | 25 | 20 | 1000 | -0.022 | 500 | 1.25 | 917 |
| #16 | 0.1770 | 25 | 20 | 1000 | -0.022 | 400 | 1.25 | 926 |
| 4.50mm | 0.1772 | 25 | 20 | 1000 | -0.022 | 400 | 1.25 | 927 |
| 4.55mm | 0.1792 | 25 | 20 | 1000 | -0.022 | 400 | 1.25 | 938 |
| #15 | 0.1800 | 25 | 20 | 1000 | -0.022 | 400 | 1.25 | 942 |
| 4.60mm | 0.1811 | 25 | 20 | 1000 | -0.022 | 400 | 1.25 | 948 |
| #14 | 0.1820 | 25 | 20 | 1000 | -0.022 | 400 | 1.25 | 952 |
| 4.65mm | 0.1831 | 25 | 20 | 1000 | -0.022 | 400 | 1.25 | 958 |
| #13 | 0.1850 | 25 | 20 | 1000 | -0.022 | 400 | 1.25 | 968 |
| 4.70mm | 0.1850 | 25 | 20 | 1000 | -0.022 | 400 | 1.25 | 968 |
| 4.75mm | 0.1870 | 25 | 20 | 1000 | -0.022 | 400 | 1.25 | 979 |
| 3/16 | 0.1875 | 25 | 20 | 1000 | -0.022 | 400 | 1.25 | 981 |
| 4.80mm | 0.1890 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 989 |
| #12 | 0.1890 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 989 |
| 4.85mm | 0.1909 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 999 |
| #11 | 0.1910 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1000 |
| 4.90mm | 0.1929 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1010 |
| #10 | 0.1935 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1013 |
| 4.95mm | 0.1949 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1020 |
| #9 | 0.1960 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1026 |
| 5.00mm | 0.1968 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1030 |
| 5.05mm | 0.1988 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1040 |
| #8 | 0.1990 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1041 |
| 5.10mm | 0.2008 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1051 |
| #7 | 0.2010 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1052 |
| 5.15mm | 0.2028 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1061 |
| 13/64 | 0.2031 | 25 | 20 | 1000 | -0.023 | 400 | 1.25 | 1063 |
| #6 | 0.2040 | 25 | 20 | 1000 | -0.024 | 400 | 1.25 | 1068 |
| 5.20mm | 0.2047 | 25 | 20 | 1000 | -0.024 | 400 | 1.25 | 1071 |
| #5 | 0.2055 | 25 | 20 | 1000 | -0.024 | 400 | 1.25 | 1075 |

Note: This information is based on 110K RPM Spindle Capability. Please use maximum spindle speed if listed RPM is unattainable

(U.S.) 1.888.848.9266

(International) 001.714.428.3655


Visit us online at KyoceraPrecisionTools.com

| Drill Size | Diameter (inch) | Feed (inch/min) | Speed (k-rpm) | Retract (inch/min) | Z-Axis Offset (inches) | Max Hits | Chipload (mm/rev) | SFM |
|------------|-----------------|-----------------|---------------|--------------------|------------------------|----------|-------------------|------|
| 5.25mm | 0.2067 | 25 | 20 | 1000 | -0.024 | 400 | 1.25 | 1082 |
| 5.30mm | 0.2087 | 25 | 20 | 1000 | -0.024 | 400 | 1.25 | 1092 |
| #4 | 0.2090 | 25 | 20 | 1000 | -0.024 | 400 | 1.25 | 1094 |
| 5.35mm | 0.2106 | 25 | 20 | 1000 | -0.024 | 400 | 1.25 | 1102 |
| 5.40mm | 0.2126 | 25 | 20 | 1000 | -0.024 | 400 | 1.25 | 1113 |
| #3 | 0.2130 | 25 | 20 | 1000 | -0.024 | 400 | 1.25 | 1115 |
| 5.45mm | 0.2146 | 25 | 20 | 1000 | -0.024 | 400 | 1.25 | 1123 |
| 5.50mm | 0.2165 | 25 | 20 | 1000 | -0.024 | 400 | 1.25 | 1133 |
| 5.55mm | 0.2185 | 20 | 20 | 1000 | -0.024 | 400 | 1.00 | 1143 |
| 7/32 | 0.2188 | 20 | 20 | 1000 | -0.024 | 400 | 1.00 | 1145 |
| 5.60mm | 0.2205 | 20 | 20 | 1000 | -0.025 | 400 | 1.00 | 1154 |
| #2 | 0.2210 | 20 | 20 | 1000 | -0.025 | 400 | 1.00 | 1157 |
| 5.65mm | 0.2224 | 20 | 20 | 1000 | -0.025 | 400 | 1.00 | 1164 |
| 5.70mm | 0.2244 | 20 | 20 | 1000 | -0.025 | 400 | 1.00 | 1174 |
| 5.75mm | 0.2264 | 20 | 20 | 1000 | -0.025 | 400 | 1.00 | 1185 |
| #1 | 0.2280 | 20 | 20 | 1000 | -0.025 | 400 | 1.00 | 1193 |
| 5.80mm | 0.2283 | 20 | 20 | 1000 | -0.025 | 400 | 1.00 | 1195 |
| 5.85mm | 0.2302 | 20 | 20 | 1000 | -0.025 | 400 | 1.00 | 1205 |
| 5.90mm | 0.2323 | 20 | 20 | 1000 | -0.025 | 400 | 1.00 | 1216 |
| A | 0.2340 | 20 | 20 | 1000 | -0.025 | 400 | 1.00 | 1225 |
| 5.95mm | 0.2343 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1226 |
| 15/64 | 0.2344 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1227 |
| 6.00mm | 0.2362 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1236 |
| B | 0.2380 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1246 |
| 6.05mm | 0.2382 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1247 |
| 6.10mm | 0.2402 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1257 |
| C | 0.2420 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1266 |
| 6.15mm | 0.2421 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1267 |
| 6.20mm | 0.2441 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1277 |
| D | 0.2460 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1287 |
| 6.25mm | 0.2461 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1288 |
| 6.30mm | 0.2480 | 20 | 20 | 1000 | -0.026 | 400 | 1.00 | 1298 |
| 6.35mm | 0.2500 | 20 | 20 | 1000 | -0.027 | 400 | 1.00 | 1308 |
| 6.40mm | 0.2520 | 20 | 20 | 1000 | -0.027 | 400 | 1.00 | 1319 |
| 6.50mm | 0.2559 | 20 | 20 | 1000 | -0.027 | 400 | 1.00 | 1339 |
| F | 0.2570 | 20 | 20 | 1000 | -0.027 | 400 | 1.00 | 1345 |
| 6.60mm | 0.2598 | 20 | 20 | 1000 | -0.027 | 400 | 1.00 | 1360 |

In some cases, there may be an opportunity to increase the chipload based on the application's robustness. Variables such as machine technology and condition, stack support materials, and Kyocera design selection may allow the increased throughput with higher chiploads. Multiply the recommended chipload by 1.15 to reach the higher chipload.

If the application is not as robust due to heavy glass, high copper content, tight annular ring requirements, or similar, multiply the recommended chipload by 0.85.

Chiploads for Cyanate Ester

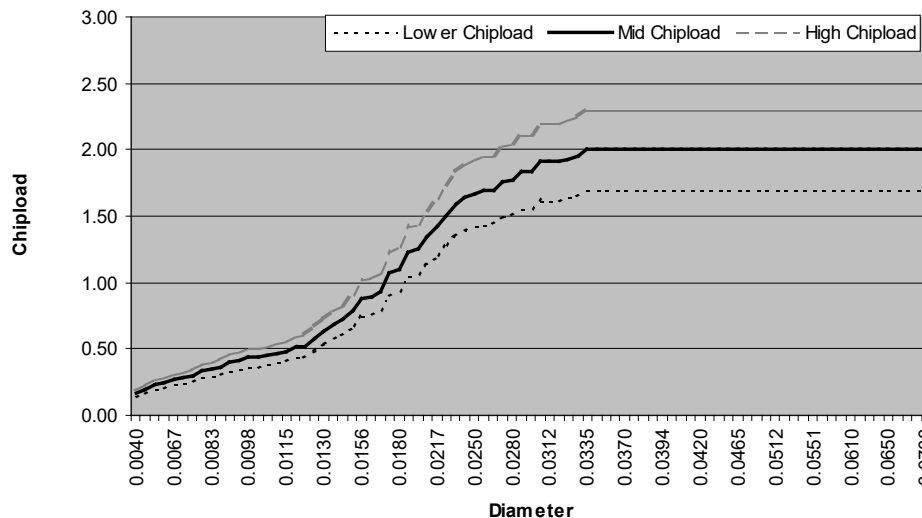

Note: This information is based on 110K RPM Spindle Capability. Please use maximum spindle speed if listed RPM is unattainable